



Width
~ 2.0mmMax. parting off dia.
≤ø20.0mm2
Corners

Parting off

JCCWS R/L



(Two corners type)

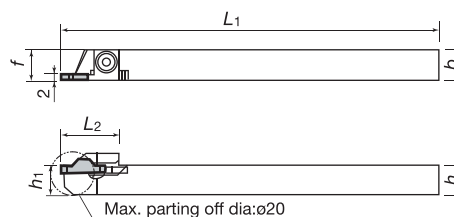

Right hand (R) shown.

Cat. No.	Stock		Applicable inserts	Dimensions (mm)							Parts		
	R	L		h	b	L ₁	L ₂	h ₁	f	Max. parting off dia	Clamping screw	Wrench	
JCCWSR/L1010K2	●	●	JCC□200F	10	10	125	19	10	10	ø20	CSTB-4S	T-15F	(T-15L)
JCCWSR/L1212K2	●	●		12	12			12	12				
JCCWSR/L1616K2	●	●		16	16			16	16				
JCCWSR/L2020K2	●	●		20	20			20	20				
JCCWSR/L2525K2	●	●		25	25			25	25				

■ Applicable inserts JCC-type inserts (With sharp edges)

Neutral (JCCN200F) Right or left hand (JCCR/L200F) Right hand (R) shown.	Cat. No.	Dimensions (mm)				θ	Grades											
		T	W	L	r_E		Coated			Coated cermet			Cermet			Uncoated		
							J740			J530			NS530			TH10		
							R	L	R	L	R	L	R	L	R	L	R	L
	JCCN200F	4.8	2	15	0	15°	●		●									●
	JCCN200F-005				0.05		●		●									●
	JCCR/L200F				0		●	●	●	●								●
	JCCR/L200F-005				0.05		●	●	●	●								●